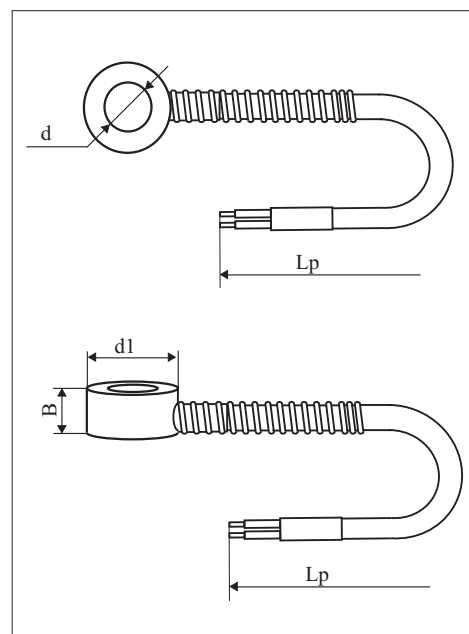


T-203a

A coiled braided stainless steel cable with a threaded end and a circular flange, secured with white zip ties.

Measuring range	up to 400°C
Measuring insert	NiCr-NiAl (K) up to PN-EN 60584 others (J,L,T,E,N) IEC 584
Protection tube material	stainless steel 1H18N9T (1.4541)
Connectin cable	insulation fiberglass x 2 - overbraid (standard)

[illegible]

T-203a-K-4-6-8-1,5-2-1- thermocouple type K, protection tube diameter d=4 mm, diameter d1=6 mm, width B=8 mm, length Lp=1,5, class 2, cable insulation fiberglass x 2.