

TEMPERATURE SENSOR

T-206a

Applications:

Temperature sensor for measurement of feeds cylinders, extruding presses and injection moulds.


Technical Data

Measuring range	up to 400°C (784°F)
Measuring insert	Fe-CuNi (J) PN-EN 60584 others (K,L,T,E,N) IEC 584
Protection tube material	nickel-plated brass
Connecting cable	insulation fiberglass x 2 overbraid (standard)



Ordering code

T	-	206a	-		-		-		-		-		-		
Thermocouple type			J												
Fe-CuNi (J)															
others (K,L,T,E,N)															
Protection tube dia. d				6											
∅ 6 mm															
∅ 5,8 mm															
Cable length Lp				1,5											
1,5 m															
others															
Process connection dimensions				M12x1											
M12x1															
others															
Connecting piece														A	
type A															
type B															
Tolerance															
class 2														2	

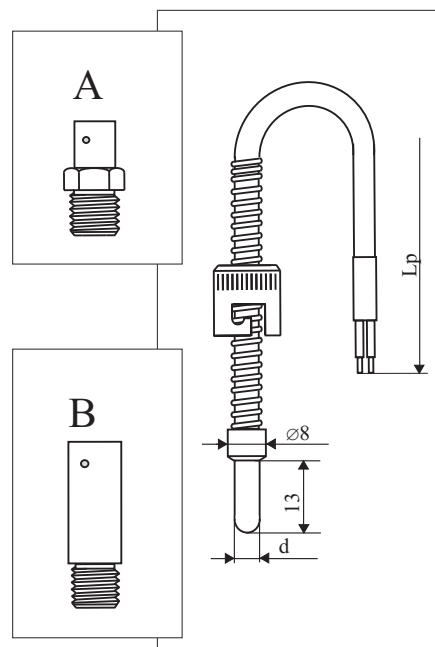

Order example:

T-206a-K-6-1,5-M12x1-A-2 -thermocouple sensor type K, length Lp=1,5 m, with thread M12x1, with connecting piece A, class 2.