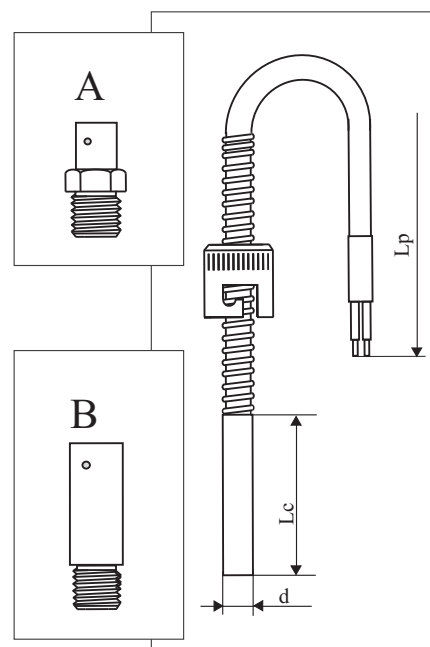


T-209a

A coiled stainless steel braided hose with a threaded end and a separate threaded fitting. The hose is made of a woven metal mesh and has a white plastic tie at one end. The fitting is a stainless steel nut with a threaded rod passing through it.

Measuring range	up to 400°C
Measuring insert	NiCr-NiAl (K) PN-EN 60584 others (J,L,T,E,N) IEC 584
Protection tube material	stainless steel 1H18N9T (1.4541) nickel-plated brass
Connecting cable	insulation fiberglass x 2 overbraid (standard)

[illegible]

T-209a-K-6-20-1,5-M14x1,5-A-1- thermocouple sensor type K, protection tube diameter d=6 mm, length Lc=20 mm, length Lp=1,5 m, with thread M14x1,5, class 2, with connecting piece A, insulation cable fiberglass x 2 - overbraid.