

TEMPERATURE SENSOR

T-217

Applications:

Temperature sensor for measurement on pipelines and other cylinder elements.


Technical Data

Measuring range	up to 250°C
Measuring insert	NiCr-NiAl (K) PN-EN 60584 others (J,L,T,E,N) IEC 584
Protection tube material	stainless steel 1H18N9T (1.4541) brass
Connecting cable	insulation fiberglass x 2 overbraid (standard)



Ordering code

T	-	217	-	-	-	-	-	-	-
Insert design		no signs							
single									
double - 2									
Thermocouple type		K							
NiCr-Al (K)									
others (J,L,T,E,N)									
Pipeline diameter d		50							
Ø 50 mm									
Ø 100 mm									
others									
Cable length Lp		1,5							
1,5 m									
others									
Tolerance		2							
class 2									
Connecting cable		1							
1 - fiberglass x 2 - overbraid									
others									

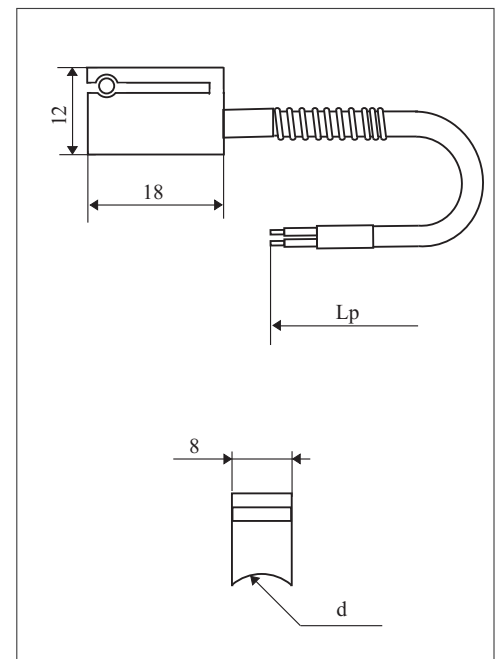

Order example:

T-217-K-50-1,5-2-1- thermocouple sensor type K, pipeline diameter d=50 mm, length Lp=1,5 m, class 2, insulation cable fiberglass x 2 - overbraid.