

TEMPERATURE SENSOR



T-225

Applications:

Temperature sensor for measurement of feeds cylinders, extruding presses and injection moulds.


Technical Data

Measuring range	up to 400°C
Measuring insert	NiCr-NiAl (K) up to PN-EN 60584 others (J,L,T,E,N) IEC 584
Protection tube material	nickel-plated brass
Connecting cable	insolation fiberglass x 2 overbraid (standard)



Ordering code

T	-	225	-		-		-		-		-		-	
Thermocouple type														
NiCr-NiAl (K)														K
others (J,L,T,E,N)														
Protection tube diameter d														
∅ 5 mm														5
others														
Protection tube diameter d1														
Æ 6 mm														6
others														
Protection tube length Lc														
50 mm														50
others														
Length Lt														
20 mm														20
others														
Cable length Lp														
1,5 m														1,5
others														
Tolerance														
class 2														2

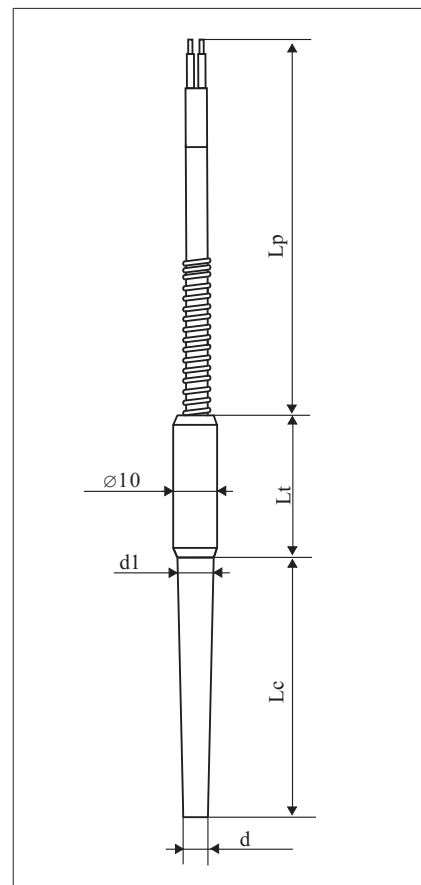

Order example:

T-225-K-5-6-50-20-1,5-2- thermocouple type K, protection tube dia. d=5 mm, protection tube dia. d1=6 mm, protection tube length Lc=50 mm, length Lt=20 mm,cable length Lp=1,5 m, class 2.