

# TEMPERATURE SENSOR

## T-226

### Applications:

Temperature sensor for measurement of feeds cylinders, extruding presses and injection moulds.


### Technical Data

Measuring range	up to 400°C
Measuring insert	NiCr-NiAl (K) PN-EN 60584 others (J,L,T,E,N) IEC 584
Protection tube material	brass
Connecting cable	insulation fiberglass x 2 overbraid (standard)



### Ordering code

T	-	225	-		-		-		-		-		-		-		-	
Thermocouple type																		
NiCr-NiAl (K)																		
others (J,L,T,E,N)																		
Protection tube diameter d																		
∅ 5 mm																		
others																		
Protection tube diameter d1																		
Æ 6 mm																		
others																		
Protection tube length Lc																		
50 mm																		
others																		
Length Lt																		
20 mm																		
others																		
Cable length Lp																		
1,5 m																		
others																		
Cable length Lp																		
1,5 m																		
others																		
Tolerance																		
class 2																		

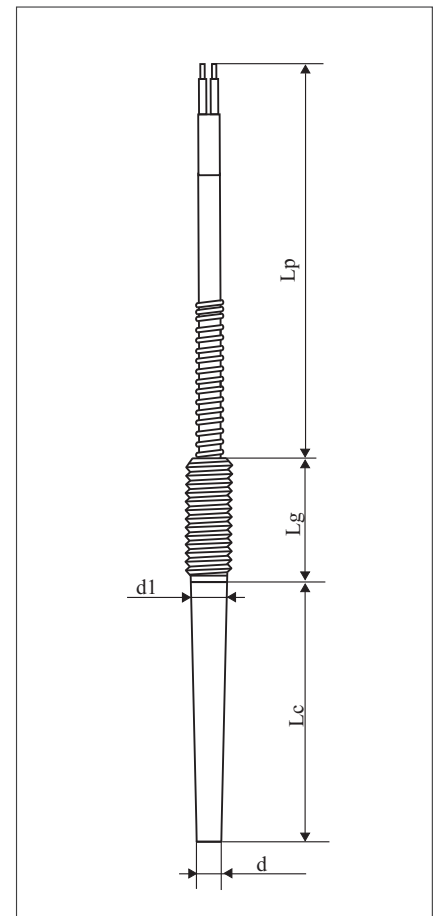

### Order example:

T-226-K-5-6-50-20-1,5-M10x1-2- thermocouple type K, protection tube dia. d=5 mm, protection tube dia. d1=6 mm, protection tube length Lc=50 mm, Lt length=20 mm, cable length Lp=1,5 m, with thread M10x1, class 2.